



RILEY AIR CONTROL SYSTEMS P L

ACCESS DOORS


SPECIFICATION DATA

The Access Door is a robust, insulated door pre hung in a heavy frame so that the unit is complete ready for immediate installation.

Each door incorporates two sets of adjustable hinges and handles (as per table) and all external hardware is chrome plated. Standard sizes are as shown and special sizes can be made to order.



MODEL	A x B	C x D	E x F	No. handles
AD5	1800 x 815	1725 x 740	1650 x 665	2
AD6	1525 x 665	1450 x 590	1375 x 515	2
AD7	1225 x 665	1150 x 590	1075 x 515	2
AD2/4	1210 x 610	1135 x 535	1060 x 460	2
AD8	925 x 665	850 x 590	775 x 515	1

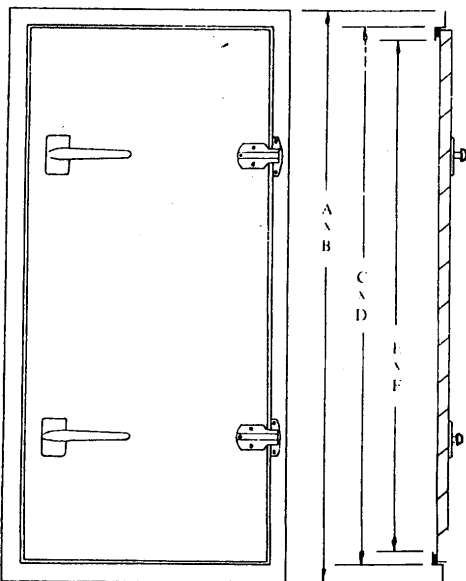

SPECIAL FEATURES INCLUDE

- Adjustable hinges
- Chrome fittings
- Heavy duty rubber gasket
- Inside "escape" handles
- Painted finish is optional

MECHANICAL FEATURES

Construction - Frame is made from 2.0mm galvanised steel - mitred, welded and ground.

Door bedding is of 1.2mm galvanized steel to form inside and outside skin.

Insulation - 25mm thick, in bat form.

Door Seal - The heavy duty gasket compresses on door closure and provides the air seal.